

Ballistic Thermal Transistor of Dielectric Four-terminal Nanostructures

Ping Yang^{1,*} and Bambi Hu^{1,2}

¹*Department of Physics, Centre for Nonlinear Studies,
and The Beijing-Hong Kong-Singapore Joint Centre
for Nonlinear and Complex Systems (Hong Kong),*

Hong Kong Baptist University, Kowloon Tong, Hong Kong, China

²*Department of Physics, University of Houston, Houston, Texas 77204-5005, USA*

Abstract

We report a theoretical model for a thermal transistor in dielectric four-terminal nanostructures based on mesoscopic ballistic phonon transport, in which a steady thermal flow condition of system is obtained to set up the temperature field effect of gate. In the environment, thermal flow shows the transisting behaviors at low temperatures: saturation, asymmetry, and rectification. The phenomena can be explained reasonably by the nonlinear variation of the temperature dependence of propagating phonon modes in terminals. The results suggest the possibility of the novel nano-thermal transistor fabrication.

PACS numbers: 66.70.-f, 63.22.-m, 65.90.+i, 73.23.Ad

*Electronic address: yangpingg@gmail.com

Rapid advances in nanometer-sized techniques have made possible the miniaturization and integration of electronic devices. Usually these device properties cannot be described by classical transport theory, since their characteristic sizes are small in comparison with the elastic mean free path between scattering events, particularly at low temperature. In this situation, the wave nature of the electrons needs to be taken explicitly into account, and electrons do not propagate diffusively instead ballistically. Based on the ballistic and phase coherent electron transport, a variety of interesting devices, e.g., the quantum stub transistor, the nanotube transistor, and the multi-terminal junctions, have been proposed[1].

As the counterpart of electron transport, mesoscopic phonon transport has been paid much attention recently. The new phenomenon of the universal quantum of thermal conductance at low temperature was predicted theoretically in mesoscopic dielectric systems[2], and verified experimentally[3]. Some investigations of thermal transport properties have been done sequentially at the variety of nanostructures[4, 5, 6, 7, 8, 9]. However the thermal transistor actions in mesoscopic dielectric systems, based on quantum interference effect, have to our knowledge not been studied either theoretically or experimentally. It should have different phenomena and mechanism from that of the work based on classical theory[10].

In this paper, we demonstrate a theoretical model of a thermal transistor in dielectric four-terminal nanostructures (DFNSs) based on the ballistic nature of phonon transport at low temperatures, in which a steady thermal flow condition of system is obtained to set up the temperature field effect of gate. Therefore the DFNSs can work as a ballistic thermal transistor, with saturation of thermal flow from source to drain for the gate temperature at large temperature difference between the source and drain. For the asymmetric structure, thermal asymmetry and rectification are showed under changes in the temperature difference. A reasonable explanation of the phenomena is given by the nonlinear variation of the temperature dependence of propagating phonon modes in terminals. The possibility of the experimental observation of these novel phenomena is also discussed.

A two-dimensional DFNS is illustrated in Fig.1(a). Four parallel terminal wires of width a_i are directly coupled to a central ballistic window region V with width b and height L (scattering region). Other ends of four-terminal wires are connected to thermal reservoirs at equilibrium with temperatures T_i , $i = 1, 2, 3, 4$, respectively. Supposed that there is no phonon scattering inside the terminal wires and the central window, and a perfect connection between terminal wires and reservoirs, phonon scattering is solely decided by the geometrical

features and happens only at interfaces between the terminal wires and the central window. The net thermal flow Q_i in terminal wire i is expressed as[6]

$$Q_i = \sum_{j(j \neq i)} Q_{ij} = \sum_{j(j \neq i)} \sum_{m,n} \int_{\max(\omega_{im}, \omega_{jn})}^{\infty} \frac{d\omega}{2\pi} \hbar \omega [n_i(\omega, T_i) - n_j(\omega, T_j)] \tilde{T}_{ji,nm}(\omega) \quad , \quad (1)$$

where $n_i(\omega, T_i) = [\exp(\hbar\omega/k_B T_i) - 1]^{-1}$ is the Bose-Einstein distribution function of the phonons with temperature T_i in the i -th reservoir, k_B is the Boltzmann constant, and $\hbar$ is Planck's constant. $\omega_{im} = \frac{\pi v m}{a_i}$ is the cutoff frequency of mode m in terminal wire i , and v ($= 5000 \text{ m} \cdot \text{sec}^{-1}$) is the group velocity. $\tilde{T}_{ji,nm}(\omega)$ is the phonon transmission coefficient that an incident phonon with energy $\hbar\omega$ from terminal i at phonon mode m is scattered to terminal j at mode n , with the property: $\tilde{T}_{ji,nm}(\omega) = \tilde{T}_{ij,mn}(\omega)$. For the present DFNSs, transmission coefficient can be obtained by the mode matching method, the same approach as Ref.[6, 7]. Thermal flow Q_{ij} is decided by two thermal reservoirs i and j , and has the property: $Q_{ij} = -Q_{ji}$.

In the paper, we assume that the dielectric four-terminal system has reached the steady state. The steady thermal flow across central window from terminal 1 to terminal 4 has the definition: $Q_1 = -Q_4$, where the plus/minus sign represents separately the thermal flow into/out of system. Meanwhile temperatures of four thermal reservoirs are assumed to have the sequence: $T_1 \geq (T_2, T_3) \geq T_4$. In terms of Eq.(1) and the steady flow definition, we readily obtain the steady thermal flow condition of system:

$$Q_{12} + Q_{13} + Q_{42} + Q_{43} = 0 \quad . \quad (2)$$

If adding the $(Q_{23} + Q_{32})$ into Eq.(2), we also get $Q_2 = -Q_3$, the steady flow between terminals 2 and 3. Obviously, the temperatures of four thermal reservoirs, which are satisfied with Eq.(2), can make the DFNS at steady state. Note that the summation of four terms in the left hand side of Eq.(2) is just the thermal flow Q^L along the vertical direction of central window (region V), which equals zero in terms of Eq.(2), (see in Fig.1(a)). This means that the thermal flow across terminals 1 and 4 isolates from that across terminals 2 and 3 at steady state of system. With the help of Eq.(1), equation (2) transforms to

$$[Q_{12}^s(T_1) + Q_{13}^s(T_1)] + [Q_{42}^s(T_4) + Q_{43}^s(T_4)] = [Q_{21}^s(T_2) + Q_{24}^s(T_2)] + [Q_{31}^s(T_3) + Q_{34}^s(T_3)] \quad , \quad (3)$$

where $Q_{ij}^s(T_i)$ is the thermal flow that is produced by single thermal reservoir with temperature T_i and that flows directly from terminal i into terminal j ; $Q_{ij}^s(T_i) =$

$\sum_m \int_{\omega_{im}}^{\infty} \frac{d\omega}{2\pi} \hbar \omega n_i(\omega, T_i) \tilde{T}_{ij,m}(\omega)$, $\tilde{T}_{ij,m}(\omega) = \sum_n \theta(\omega - \omega_{jn}) \tilde{T}_{ij,mn}(\omega)$. In this way, the steady flow condition of system of Eq.(2) can be expressed by four single thermal reservoirs. We take reservoir 1 for the source with $T_s = T_1$, reservoir 4 for the drain with $T_d = T_4$, and reservoirs 2 and 3 for the gates with $T_g = T_2 = T_3$ respectively. The simplified form of Eq.(3) is written as

$$E_1^s(T_s) + E_4^s(T_d) = E_2^s(T_g) + E_3^s(T_g) , \quad (4)$$

where $E_1^s(T_s) = Q_{12}^s(T_s) + Q_{13}^s(T_s)$, $E_4^s(T_d) = Q_{42}^s(T_d) + Q_{43}^s(T_d)$, $E_2^s(T_g) = Q_{21}^s(T_g) + Q_{24}^s(T_g)$, and $E_3^s(T_g) = Q_{31}^s(T_g) + Q_{34}^s(T_g)$. Equation (4) sets up the source-gate-drain (SGD) relation, in which the gates connect the source and drain respectively and work as controlling ends. For a fixed gate temperature T_g , a pair of corresponding temperatures T_s and T_d can be obtained from Eq.(4). Each set of temperatures including the T_g and a pair of T_s and T_d can make sure the system at steady state and be used to calculate the steady thermal flow Q_{sd} from source to drain in terms of Eq.(1); $Q_{sd} = Q_1$ in terminal 1 and $Q_{sd} = -Q_4$ in terminal 4. As stated above, we can get all values of the steady thermal flow Q_{sd} corresponding to different temperature pairs of T_s and T_d that set up the temperature difference between source and drain, *i.e.*, $T_{sd} = T_s - T_d$, for the fixed T_g in the DFNSs. The schematic diagrams of working procedure for Q_{sd} is shown in Fig.1(b)–(d). Furthermore, as $Q^L = 0$, the influence of the gate temperature T_g on the steady thermal flow Q_{sd} should be attributed to the temperature field effect (TFE). Note that all temperatures in the paper always mean those of thermal reservoirs.

For the symmetric DFNS, the inset(a) of Fig. 2 shows the calculated thermal flow Q_{sd} as a function of the temperature difference $T_{sd} = T_s - T_d$ for five different values of T_g . As seen in the figure, Q_{sd} first increases, and then tends to saturation with T_{sd} increasing for the five T_g s. In the following, we will study the phenomenon based on mesoscopic ballistic transport theory. Figure 3 illustrates the cutoff frequencies of the discrete transverse phonon modes (threshold energy) respectively in terminal 1, scattering region V , and terminal 4, where the superscript p and n represent separately the positive T_{sd} at $T_s > T_d$ and the negative T_{sd} at $T_s < T_d$. For the symmetric DFNS with $a_1 = a_2 = a_3 = a_4 = 20nm$, as shown in Fig.3(a), the mode spacing $\Delta_i = \omega_{i(m+1)} - \omega_{im} = \frac{\pi v}{a_i}$ in terminal 1 equals that of terminal 4. At initial state with $T_s^p = T_d^p = T_g$, the system is at equilibrium ($T_{sd}^p = 0$, $Q_{sd} = 0$). Then the enhance of T_s^p relative to the fixed T_g excites the additional

phonon modes Δm_1^p in terminal 1 and makes energy into terminals 2 and 3 from all modes $(m_1^{eq} + \Delta m_1^p)$ in terminal 1, in terms of $\frac{\pi v \Delta m_1^p}{a_1} \sim k_B |T_s^p - T_g| / \hbar$, where the superscript *eq* represents the equilibrium state. Since $Q_{ij}^s(T_i)$ in Eq.(3) is monotonously increasing function of temperature T_i [6, 7], $E_1^s(T_s)$ in Eq.(4) increases correspondingly. Meanwhile, to balance the both sides in Eq.(4), $E_4^s(T_d)$ must have equal amount decreased because $E_2^s(T_g)$ and $E_3^s(T_g)$ in Eq.(4) keep constant. This means that the modes m_4^{eq} in terminal 4 have Δm_4^p decrease and the corresponding temperature T_d^p drops below T_g as shown in Fig.3(a). Since Δm_1^p excited by T_s^p at $T_s^p > T_g$ are higher energy modes, the decreased energy of Δm_4^p which equals Δm_1^p is not sufficient to cancel out the additional energy produced by T_s^p . Therefore Δm_4^p in terminal 4 must be more than Δm_1^p in terminal 1, *i.e.*, $\Delta m_4^p > \Delta m_1^p$, in order to make the increased energy from $(m_1^{eq} + \Delta m_1^p)$ in terminal 1 and the decreased energy from Δm_4^p in terminal 4 equal. This means that there is an unequal amount change of Δm_1^p and Δm_4^p for the equal amount of $E_1^s(T_s)$ increase and $E_4^s(T_d)$ decrease in Eq.(4). With T_{sd}^p increasing further, as $\Delta m_i^p \sim |T_i^p - T_g|$, the ratio of Δm_1^p to Δm_4^p is the nonlinear monotonously decreasing; therefore T_s^p shows the nonlinear increasing behavior, meanwhile T_d^p has the nonlinear decreasing behavior as shown in Fig.4(a), in order to keep the system at steady state. Obviously the modes $(\Delta m_1^p + \Delta m_4^p)$ corresponding to $(T_s^p - T_d^p)$ become more with T_{sd}^p increasing, but the ratio of Δm_1^p to $(\Delta m_1^p + \Delta m_4^p)$ goes down. This means that T_s^p has less contribution than T_d^p for T_{sd}^p increasing in terms of $\Delta m_i^p \sim |T_i^p - T_g|$. On the other hand, as the propagating channel between the source and drain consists of the propagating phonon modes $(m_1^{eq} + \Delta m_1^p)$ in terminal 1 and $(m_4^{eq} - \Delta m_4^p)$ in terminal 4, Q_{sd} increases with T_{sd}^p ; but the increment rate of thermal conductance Q_{sd}/T_{sd}^p reduces with T_{sd}^p increasing, *i.e.*, $Q_{sd}/T_{sd}^p > 0$ and $\frac{d}{dT_{sd}^p}(Q_{sd}/T_{sd}^p) < 0$, (see in Fig.4(b)). Consequently, under the influence of T_g , the nonlinear variation of the modes Δm_1^p and Δm_4^p in the modes $(\Delta m_1^p + \Delta m_4^p)$ that corresponds to T_{sd}^p leads to the saturation behavior of thermal flow Q_{sd} in the DFNS. Furthermore, as the mode spacings in terminals 1 and 4 are identical in this symmetric structure, Q_{sd} presents symmetry in the reversal of T_{sd}^p , *i.e.*, $T_d^n > T_s^n$. Additionally, $Q_2 (= -Q_3)$ is two orders of magnitude lower than Q_{sd} .

In order to investigate the asymmetric effect, we change the DFNS from the symmetric structure to the asymmetric with $a_1 = a_2 = a_3 = 20nm$, $a_4 = 40nm$. As shown in Fig.2, there is asymmetry in the $Q_{sd} - T_{sd}$ behavior with thermal flow saturation for the positive and negative T_{sd} for four values of T_g . (i) Thermal saturation discussion: for the asymmetric

DFNS, the mode spacing $\Delta_1 = \frac{\pi v}{a_1}$ in terminal 1 is twice Δ_4 in terminal 4; there is a higher density of transverse phonon modes in terminal 4 as shown in Fig.3(b). When T_s^p increases over T_g , thermal energy input from the modes $(m_1^{eq} + \Delta m_1^p)$ in terminal 1 is canceled out by the decreased modes Δm_4^p along with T_d^p lowering, to satisfy the SGD relation, (see in Fig.3(b) and Fig.4(c)). However, because there is higher density of phonon modes in terminal 4 than that in the symmetric situation, at initial stage, the small change of T_d^p could make sufficient modes Δm_4^p decreased to cancel out the energy input from T_s^p enhance; the ratio of Δm_1^p to $(\Delta m_1^p + \Delta m_4^p)$ drops less with T_{sd}^p increasing, in comparison with the symmetric situation. Therefore Q_{sd}/T_{sd}^p increases with T_{sd}^p increasing, *i.e.*, $Q_{sd}/T_{sd}^p > 0$ and $\frac{d}{dT_{sd}^p}(Q_{sd}/T_{sd}^p) > 0$, (see in Fig.4(d)). With T_s^p increasing further, more Δm_1^p with higher energy in terminal 1 are excited and more energy is input into system; therefore Δm_4^p in terminal 4 reduce more and T_d^p correspondingly goes much down to balance the both sides in Eq.(4). The ratio of Δm_1^p to $(\Delta m_1^p + \Delta m_4^p)$ decreases remarkably with T_{sd}^p , similar to the symmetric situation. Thus Q_{sd}/T_{sd}^p changes from increase to decrease with T_{sd}^p , as shown in Fig.4(d); $\frac{d}{dT_{sd}^p}(Q_{sd}/T_{sd}^p) > 0$ at beginning, and then $\frac{d}{dT_{sd}^p}(Q_{sd}/T_{sd}^p) < 0$ after T_{sd}^p passing a critical value. This means that $Q_{sd} - T_{sd}^p$ curve increases monotonously with the concave shape at beginning, and then keeps going with the convex shape after passing a turning point, and finally tends to saturation, (see in Fig.2). (ii) Thermal asymmetry and rectification discussion: in the reverse case with $T_d^n > T_s^n$, due to the higher density of phonon modes in terminal 4, T_d^n enhance over T_g could easily excite more Δm_4^n in terminal 4 and makes more energy into system. This leads that Δm_1^n in terminal 1 must decrease much, due to the larger mode spacing $\Delta = \frac{\pi v}{a_1}$ in terminal 1. Thus T_s^n corresponding to Δm_1^n decreases more, in terms of $\frac{\pi v \Delta m_1^n}{a_1} \sim k_B |T_s^n - T_g|/\hbar$, (see in Fig.3(b)). The ratio of Δm_4^n to $(\Delta m_1^n + \Delta m_4^n)$ decreases rapidly with T_{sd}^n , so that Q_{sd} tends more quickly to saturation in the reverse case as shown in Fig.2. Furthermore for the fixed T_{sd} : $|T_s - T_d| = (T_s^p - T_d^p) = (T_d^n - T_s^n) = \text{constant}$, the Δm_1^p with higher energy for the positive case ($T_s^p > T_d^p$) is more than the Δm_4^n for the reverse case ($T_s^n < T_d^n$); therefore we have $T_s^p > T_d^n$ and $T_d^p > T_s^n$, (see in Fig.3(b)). Thus, in the positive case, T_s^p and T_d^p locate at higher temperature region to make more modes with higher energy participated in thermal transport; for the reverse case, T_s^n and T_d^n is situated at lower temperature region to excite less modes with higher energy for thermal transport, (see in Fig.4(c) and Fig.3(b)). Consequently the $Q_{sd} - T_{sd}$ characteristics display a distinct asymmetry and rectifying behavior in the asymmetric structure as shown in Fig.2.

In the above discussion, the main effect of T_g is to set up a reference temperature which makes the nonlinear variation of Δm_1 and Δm_4 possible.

In view of some successful thermal measurements in nanoscale[3, 11, 12], it is possible to realize the relevant experiments for the novel phenomena in the DFNSs. Authors think that the steady thermal flow in the ballistic system is a necessary factor to observe these thermal transisting behaviors as discussed in the paper.

In summary, thermal transistor has been designed theoretically in the DFNSs. When satisfied with the steady thermal flow condition of system, saturation and asymmetry and rectification of thermal flow are exhibited separately in the symmetric and asymmetric DFNSs. The relevant physical mechanism is elucidated by the nonlinear variation of temperature dependence of phonon modes in terminals. The mechanism is also helpful to investigation of the negative differential thermal resistance and thermal diode design in nanoscale systems.

This work was supported through grants by the Hong Kong Research Grants Council (RGC) and the Hong Kong Baptist University Faculty Research Grant (FRG).

-
- [1] F. Sols *et al.*, Appl. Phys Lett. **54**, 350 (1989); J. Wang *et al.*, Phys. Rev. B **46**, 2420 (1992); C. Dekker *et al.*, Nature **393**, 49 (1998); A. N. Andriotis *et al.*, Phys. Rev. Lett. **87**, 066802 (2001); Tersoff *et al.*, Phys. Rev. Lett. **88**, 258302 (2002); H. Q. Xu, Appl. Phys. Lett. **80**, 853 (2002).
 - [2] L. G. C. Rego and G. Kirczenow, Phys. Rev. Lett. **81**, 232 (1998).
 - [3] M. L. Roules *et al.*, Nature **404**, 974 (2000).
 - [4] D. E. Angelescu, M. C. Cross, and M. L. Roukes, Superlattices and Microstructures **23**, 673 (1998).
 - [5] D. H. Santamore and M. C. Cross, Phys. Rev. B **63**, 184306 (2001).
 - [6] Q.-F. Sun, P. Yang, and H. Guo, Phys. Rev. Lett. **89**, 175901 (2002).
 - [7] P. Yang, Q.-F. Sun, H. Guo, and B. Hu, Phys. Rev. B **75**, 235319 (2007).
 - [8] Y. Ming, Z. X. Wang, Q. Li, and Z. J. Ding, Appl. Phys. Lett. **91**, 143508 (2007).
 - [9] J. Wang and J.-S. Wang, Phys. Rev. B **74**, 054303 (2006).
 - [10] B. Li, L. Wang, and G. Casati, Appl. Phys. Lett. **88**, 143501 (2006).
 - [11] D. Y. Li *et al.*, Appl. Phys. Lett. **83**, 2934 (2003).

- [12] C. W. Chang, D. Okawa, A. Majumdar, and A. Zettl, *Science* **314**, 1121 (2006).

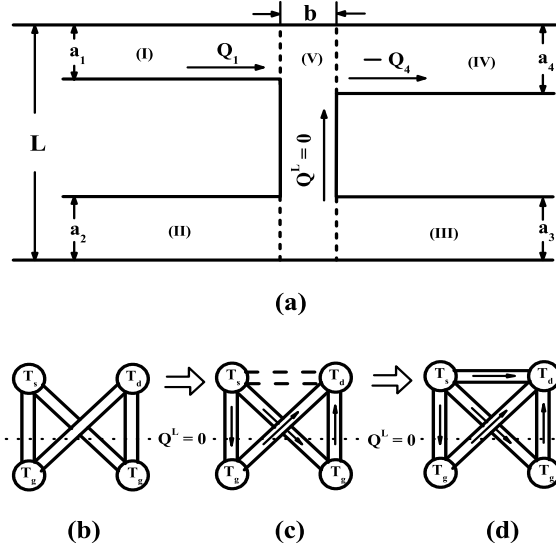


FIG. 1: Schematic diagrams for the research system and the working illustration of SGD. Arrow lines represent the thermal flows. (a) A four-terminal structure. (b) SGD at equilibrium: $T_s = T_g = T_d$. (c) SGD at steady state: $T_s > T_g > T_d$; a propagating channel (dash lines) is set up between the source and drain. (d) Thermal flow profile at steady state. Q_1 is the net thermal flow in terminal 1, and Q^L is the net thermal flow across the level line (dot line) or (arrow line) in the vertical direction of region V and always equals zero at steady state of system.

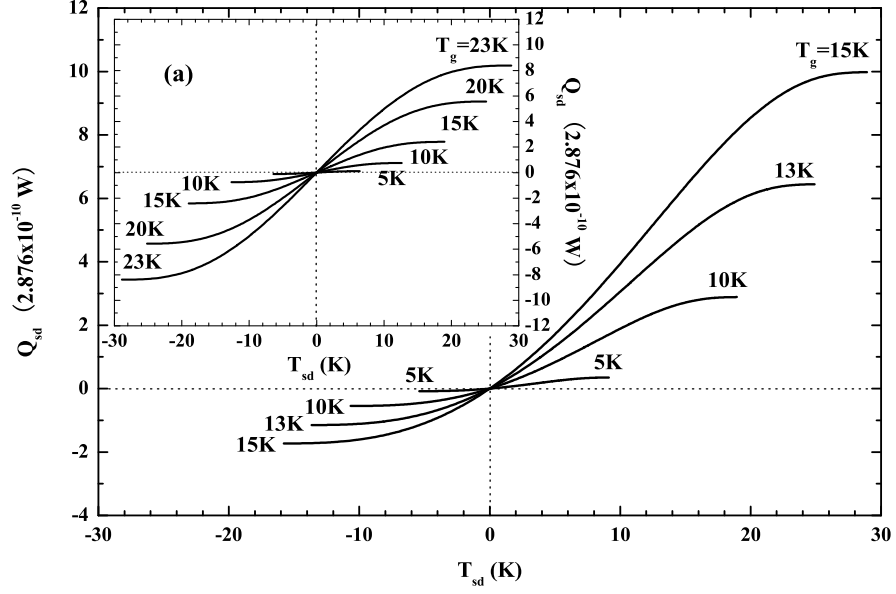


FIG. 2: Thermal flow Q_{sd} vs temperature difference T_{sd} for the gate temperature T_g in the DFNS, the same structure as shown in Fig.1(a). [Main figure] Asymmetric structure with $a_4 = 40\text{nm}$. [Inset (a)] Symmetric structure with $a_4 = 20\text{nm}$. Other parameters: $a_1 = a_2 = a_3 = 20\text{nm}$, $L = 100\text{nm}$, $b = 20\text{nm}$.

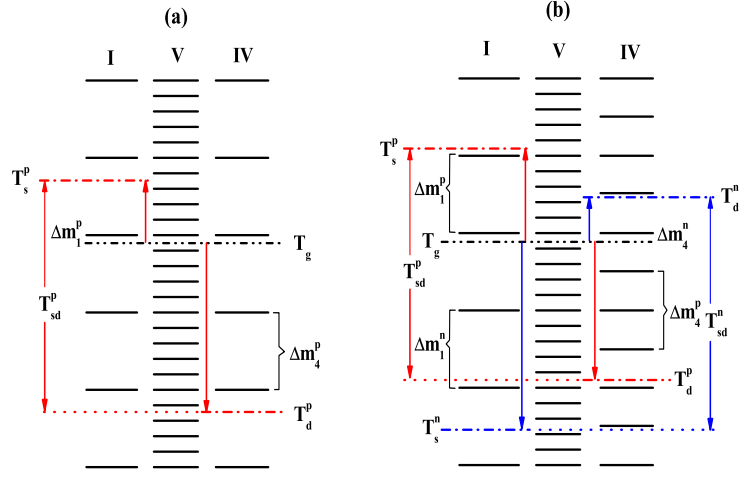


FIG. 3: Schematic diagrams for the cutoff frequencies of discrete transverse phonon modes or threshold energy (straight lines) for terminal I , region V , and terminal IV . Dash dot dot line: the gate temperature T_g . Dash dot lines: temperatures T_s and T_d . Arrow lines: the change of temperatures relative to T_g . The superscript p represents the positive T_{sd} ($T_s > T_d$); n for the negative T_{sd} ($T_s < T_d$). Δm_1^p is modes in terminal 1 excited by T_s^p . (a) Symmetric structure. (b) Asymmetric structure for $T_{sd}^p = T_{sd}^n$.

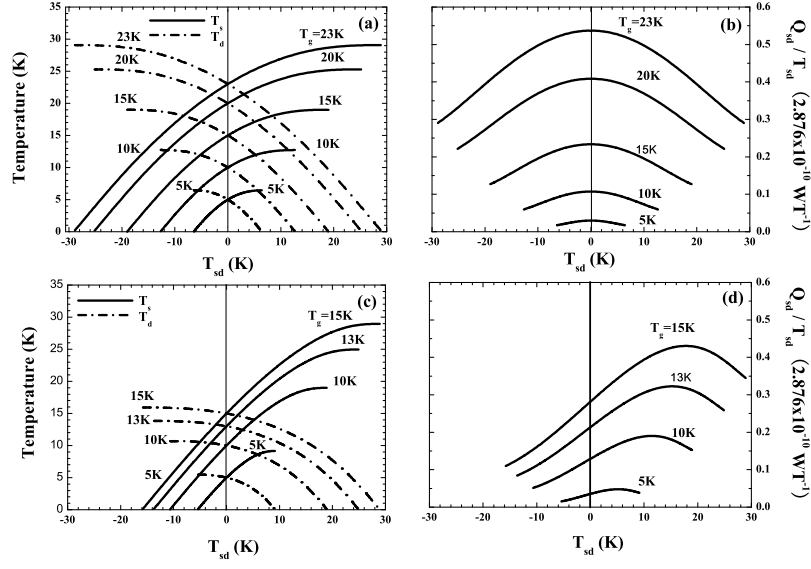


FIG. 4: At steady state of system, for the fixed gate temperatures T_g s: [(a) and (c)] Temperatures T_s in source and T_d in drain vs temperature difference T_{sd} between the source and drain, respectively for the symmetric and asymmetric cases. [(b) and (d)] Thermal conductance Q_{sd}/T_{sd} vs T_{sd} respectively for the symmetric and asymmetric cases.